

BVT-DP2

Probe-style desuperheater





Probe-style desuperheater




About us

BVT Sweden was started with the ambition of becoming world leading in critical applications in process steam and thermal power plant turbine bypass. Based in Säffle, BVT Sweden employs experts with over 30 years experience in turbine bypass, steam conditioning, temperature control, design and manufacturing processes. We design turbine bypass valves, select actuation to fit our customer's requirements. Our products are optimized on a per-order basis, and we have the experience necessary to design special solutions. These products cover steam conditioning valves, pressure reduction valves, stop valves, desuperheaters and spray water control valves.

BVT-DP2 desuperheater

The BVT-DP2 probe-style desuperheater is a combination of injection nozzle and water control valve, designed for precise and economical control of steam temperature. Water enters through the flanged water connection, and is passed through the desuperheater body installed in the steam pipe at an 45° angle. The nozzle at the end of the desuperheater is equipped with individual feed holes. Water enters the chamber behind the orifice plate through these openings where it is rotated before being injected into the steam flow. This rotational flow as well as the cone shaped mist the nozzle creates at the injection point reduces evaporation time, and thus improves desuperheating.

Water injection is controlled by a diaphragm actuator based on measured downstream temperature.



BVT-DP2 PRODUCT CODE

Key features

- ✓ Injection nozzle with rotational injection
- ✓ High rangeability and cooling efficiency
- ✓ Few moving parts and hard-faced control plug and injection nozzle resulting in high reliability and resistance against wear
- ✓ Simple installation

Specifications

Capacity

Multiple options based on customer needs

Characteristics

Equal percentage

Control range (water)

up to 50:1

Pressure class


EN PN up to 400 ASME up to 2500

Materials

Body 11CrMo9-10 Plug X20/X19 Atomizer X20/X19 Nozzle head X90CrMoV18 Stuffing box Valveset

Installation

Horizontal installation recommended. In case of other installations, contact BVT Sweden AB.

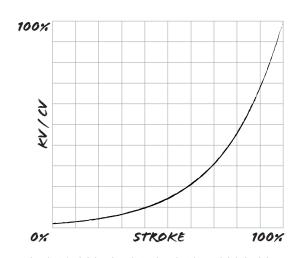

EQUAL PERCENTAGE CHARACTERISTIC






Overview



BVT-DPZ DESUPERHEATER

Installation

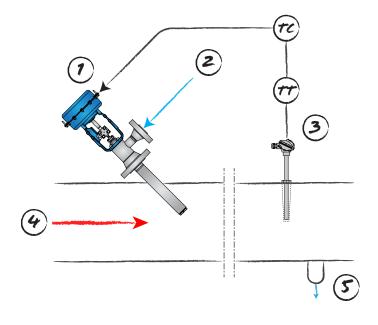

- 1. DP2 DESUPERHEATER
- 2. SPRAY WATER / CONDENSATE
- 3. TEMPERATURE SENSOR
- 4. SUPERHEATED STEAM
- S. DRAINAGE
- TT. TEMPERATURE SENSOR
- TC. TEMPERATURE CONTROL



Probe-style desuperheater



Water valves

BVT provides a multitude of spray water control valves, selected and designed to match operating conditions and customer requirements. The trims are chosen to prevent cavitation and flashing and prevent aerated liquids from corroding or eroding valve parts. They are equipped with quick exchange trims for more convenient inspection replacement. Among the options of trim designs are contour plugs, multistep plugs, multi-cage and labyrinth disc stacks.

Trim types

PT (Plug throttling)
Cv Range: 1.4 ~ 9930
Rangeability: 25 to 1
Leakage class: IV / V

HSC (Micro High Step Cascade)


Cv Range: 0.24 ~ 406 Rangeability: 100 to 1 Leakage class: V

HEST (Single seat, drilled cage)

Cv Range: 38 ~ 8900 Rangeability: Varies Leakage class: IV / V



LEFT: ANGLE-STYLE VALVE BODY RIGHT: GLOBE STYLE VALVE BODY

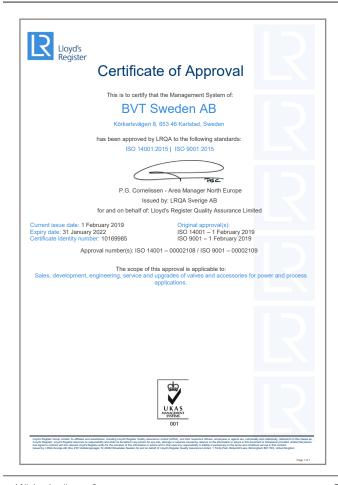



Körkarlsvägen 8 653 46 Karlstad SWEDEN E-mail sales@bvtsweden.com

Åmålsvägen 13 661 32 Säffle SWEDEN